


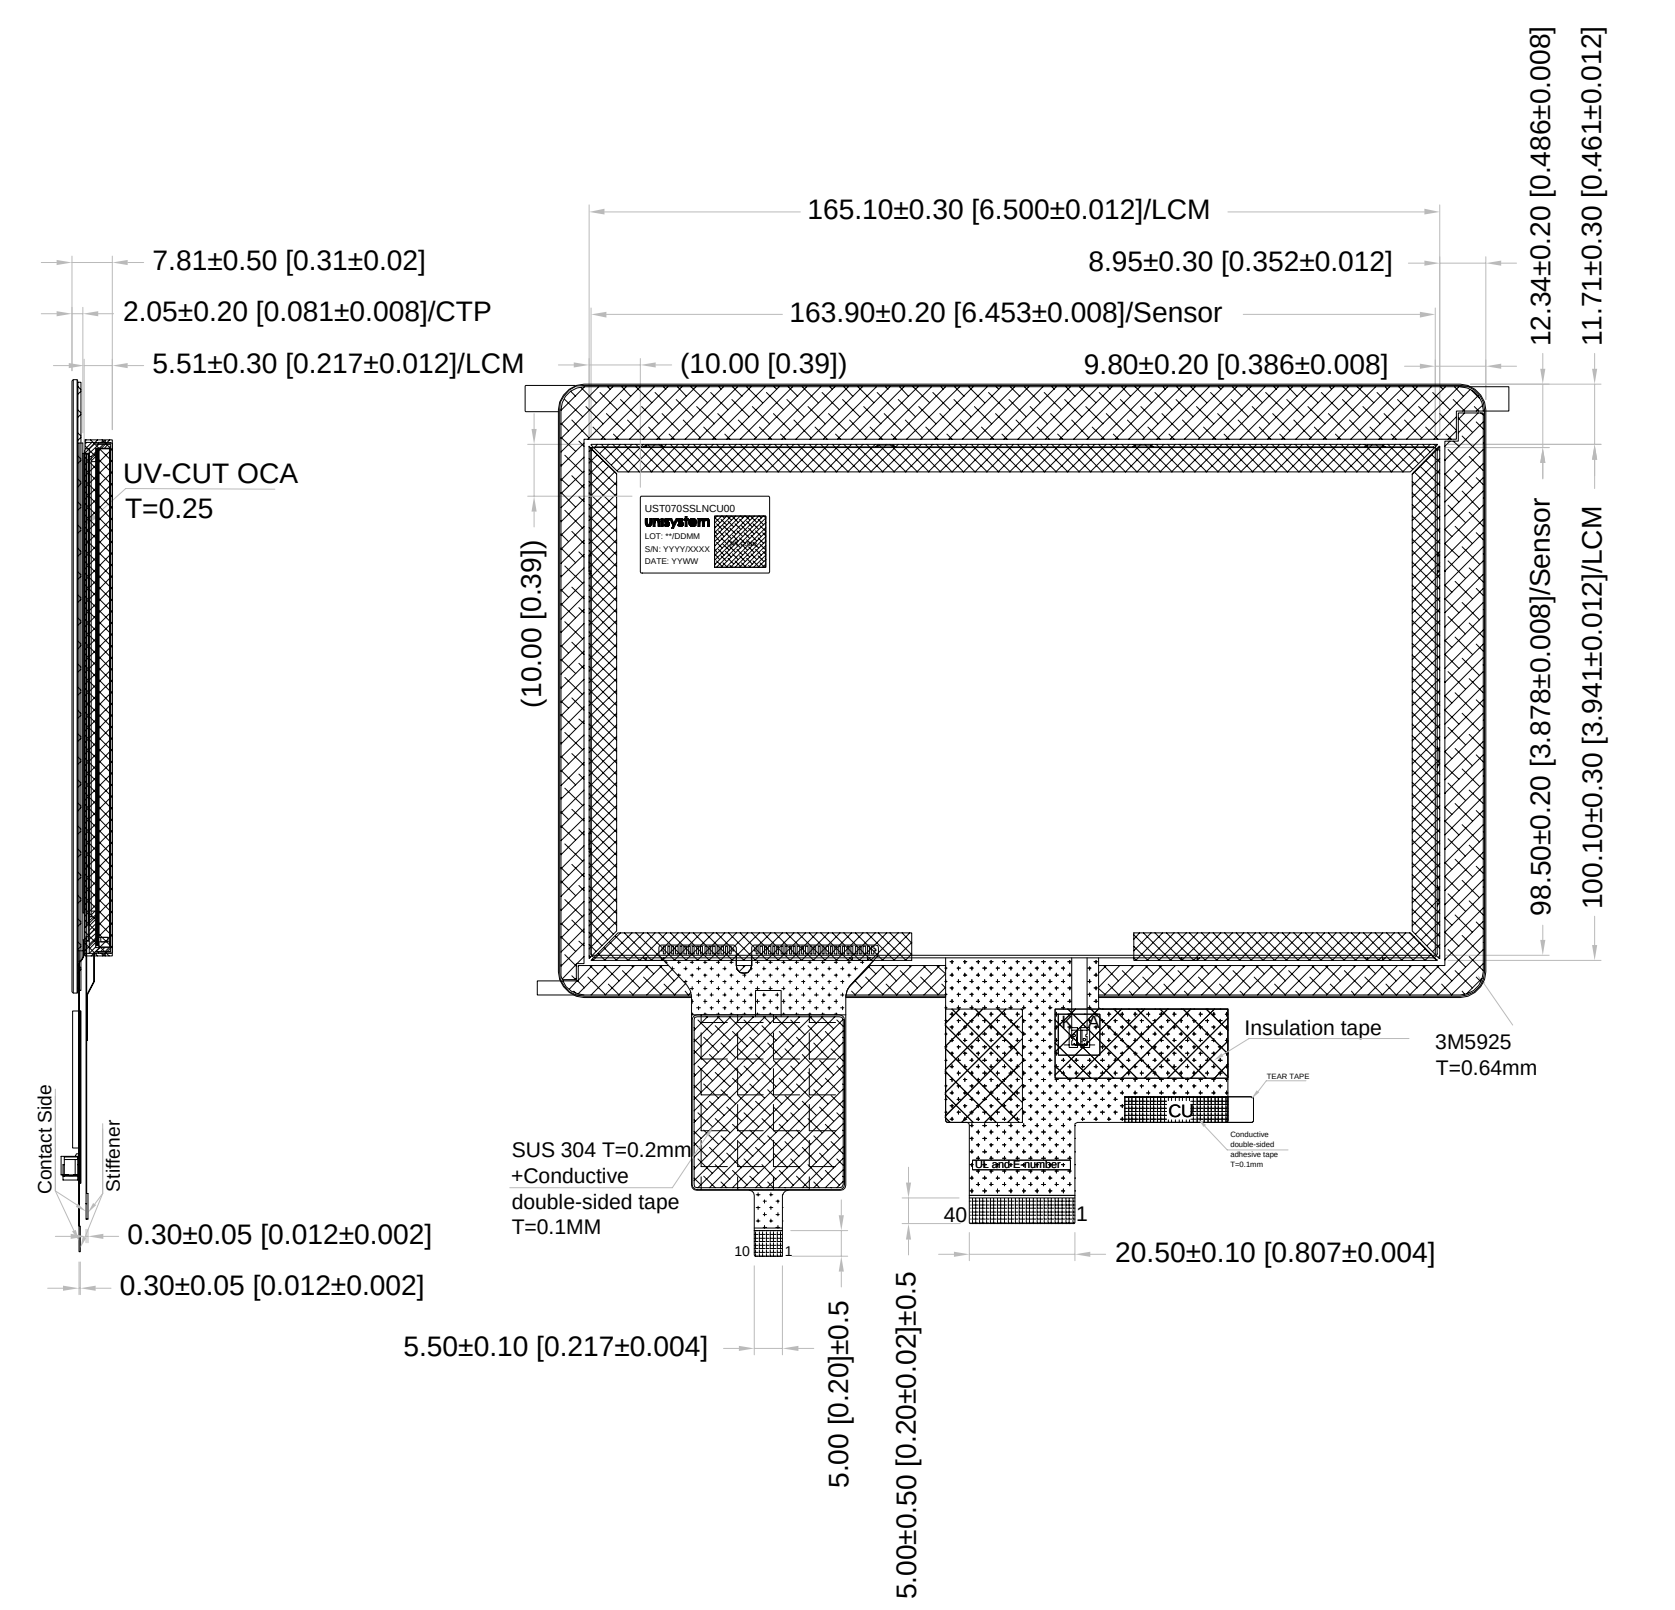

TFT NOTES: 1. DISPLAY TYPE: TRANSMISSIVE, IPS, NORMALLY BLACK 2. COLOR DEPTH: 16.7M 3. RESOLUTION: 1024x600 4. VIEWING ANGLE: FULL 5. INTERFACE: LVDS 6. DRIVER IC: JD9165BA 7. LOGIC VOLTAGE: 3.3V 8. SURFACE LUMINANCE: 900 cd/m²(WITH CTP) 9. BACKLIGHT: 30 WHITE CHIP LED V_f= 8.1~9.9V I_f= 250mA LED LIFETIME: 100k hours.	
---	--

TP NOTES:

1. TP STRUCTURE: G+G
2. INTERFACE: USB/I2C
3. DRIVER IC: ILI2520
4. OPERATING VOLTAGE: 3.3V(I2C); 5.0V(USB)
5. SURFACE HARDNESS: $\geq 6H$
6. TRANSMITTANCE: $\geq 85\%$
7. CG GLASS THICKNESS: 1.1mm

GENERAL NOTES:

1. OPERATING TEMPERATURE: -20°C ~ 70°C
2. STORAGE TEMPERATURE: -30°C ~ 80°C
3. WITHOUT INDIVIDUAL TOLERANCE: SEE TABLE
4. RoHS COMPLIANT
5. MAX. FLATNESS GEOMETRIC TOLERANCE OF THE SURFACE ON WHICH THE MODULE IS MOUNTED:
6. MIN. SURFACE ENERGY OF THE MATERIAL ON WHICH THE MODULE IS MOUNTED: 37 mN/m(dyn/cm)
7. MAX. FFC PULLING FORCE: TBD
8. SHELF TIME OF THE MODULE: 2 YEARS.
9. () - REFERENCE DIM; [] - INCH DIM.

			
PN: UST070SSLNCU00			
REV/DOC_VER: V2 / D1			
DRAWN: M.K.	05.10.2026	1:1.48	
CHECKED: MP	05.10.2026	[mm]	
APPR: J.M.	05.10.2026	ISO A3	
			P. 1 of 2


LCD CONNECTOR			
Pin No.	Desc.	Pin No.	Desc.
1	NC	21	RXIN3+
2	VDD(3.3V)	22	GND
3	VDD(3.3V)	23	NC
4	NC	24	NC
5	RESET	25	GND
6	STBYB	26	NC
7	GND	27	NC
8	RXIN0-	28	SELB
9	RXIN0+	29	VESA/JEIDA
10	GND	30	GND
11	RXIN1-	31	LED-
12	RXIN1+	32	LED-
13	GND	33	L/R
14	RXIN2-	34	U/D
15	RXIN2+	35	NC
16	GND	36	NC
17	RXCLKIN-	37	NC
18	RXCLKIN+	38	NC
19	GND	39	LED+
20	RXIN3-	40	LED+

TOUCH PANEL CONNECTOR			
Pin No.	Desc.	Pin No.	Desc.
1	USB_GND	6	I2C_VDD
2	USB_VDD	7	I2C_RST
3	USB_D-	8	I2C_SCL
4	USB_D+	9	I2C_INT
5	I2C_GND	10	I2C_SDA

CN1 CONNECTOR			
Pin No.	Desc.	Pin No.	Desc.
1	USB_VDD	3	USB_D+
2	USB_D-	4	USB_GND

CN2 CONNECTOR			
Pin No.	Desc.	Pin No.	Desc.
1	I2C_GND	4	I2C_SCL
2	I2C_VDD	5	I2C_INT
3	I2C_RST	6	I2C_SDA

V2	D1	Adjusted design details	23/09/2026
V1	D1	Initial Case	27/08/2026
Rev	Ver	Changes	Data

				
PN: UST070SSLNCU00				
REV/VER: V2 / D1				
DRAWN: M.K.	05.10.2026	1:1.48		
CHECKED: MP	05.10.2026	[mm]		
APPR: J.M.	05.10.2026	ISO A3		
				P. 2 of 2