



WINSTAR Display Co.,Ltd.
華凌光電股份有限公司



Winstar Display Co., LTD

華凌光電股份有限公司



WEB: <https://www.winstar.com.tw> E-mail: sales@winstar.com.tw

SPECIFICATION

CUSTOMER : _____

MODULE NO.: **WF57A5TYAFDNT0#**

APPROVED BY: (FOR CUSTOMER USE ONLY)	PCB VERSION: DATA:
--	---

SALES BY	APPROVED BY	CHECKED BY	PREPARED BY
			葉虹蘭
ISSUED DATE: 2025/01/13			

TFT Display Inspection Specification: <https://www.winstar.com.tw/technology/download.html>

Precaution in use of TFT module: <https://www.winstar.com.tw/technology/download/declaration.html>



RECORDS OF REVISION

DOC. FIRST ISSUE

VERSION	DATE	REVISED PAGE NO.	SUMMARY
0	2023/12/28		First issue
A	2024/02/29		Modify TP and LCD type (Normally black)
B	2024/03/13		Modify Static electricity test
C	2025/01/13		Modify LED Life Time & Reliability

Contents

1.Module Classification Information

2.Summary

3.General Specifications

4.Absolute Maximum Ratings

5.Electrical Characteristics

6.Timing Characteristics

7.Power Sequence

8.Optical Characteristics

9.Interface

10.Reliability

11.Touch Panel Information

12.Contour Drawing

13.Other

1.Module Classification Information

W F 57 A5 T Y A F D N T 0 #
 ① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨ ⑩ ⑪ ⑫ ⑬

①	Brand : WINSTAR DISPLAY CORPORATION																																																																							
②	Display Type : F→TFT Type, J→Custom TFT																																																																							
③	Display Size : 5.7” TFT																																																																							
④	Model serials no.																																																																							
⑤	Backlight Type :	F→CCFL, White S→LED, High Light White						T→LED, White Z→Nichia LED, White																																																																
⑥	LCD Polarize Type/ Temperature range/ Gray Scale Inversion Direction	A→Transmissive, N.T, IPS TFT C→Transmissive, N. T, 6:00 ; F→Transmissive, N.T,12:00 ; I→Transmissive, W. T, 6:00 K→Transflective, W.T,12:00 L→Transmissive, W.T,12:00 N→Transmissive, Super W.T, 6:00						Q→Transmissive, Super W.T, 12:00 R→Transmissive, Super W.T, O-TFT V→Transmissive, Super W.T, VA TFT W→Transmissive, Super W.T, IPS TFT X→Transmissive, W.T, VA TFT Y→Transmissive, W.T, IPS TFT Z→Transmissive, W.T, O-TFT																																																																
⑦	A : TFT LCD B : TFT+SCREW HOLES+CONTROL BOARD C : TFT+ SCREW HOLES +A/D BOARD D : TFT+ SCREW HOLES +A/D BOARD+CONTROL BOARD E : TFT+ SCREW HOLES +POWER BOARD						F : TFT+CONTROL BOARD G : TFT+ SCREW HOLES H : TFT+D/V BOARD I : TFT+ SCREW HOLES +D/V BOARD J : TFT+POWER BD																																																																	
⑧	Resolution: <table><tr><td>A</td><td>128160</td><td>B</td><td>320234</td><td>C</td><td>320240</td><td>D</td><td>480234</td><td>E</td><td>480272</td><td>F</td><td>640480</td></tr><tr><td>G</td><td>800480</td><td>H</td><td>1024600</td><td>I</td><td>320480</td><td>J</td><td>240320</td><td>K</td><td>800600</td><td>L</td><td>240400</td></tr><tr><td>M</td><td>1024768</td><td>N</td><td>128128</td><td>P</td><td>1280800</td><td>Q</td><td>480800</td><td>R</td><td>640320</td><td>S</td><td>480128</td></tr><tr><td>T</td><td>800320</td><td>U</td><td>8001280</td><td>V</td><td>176220</td><td>W</td><td>1280398</td><td>X</td><td>1024250</td><td>Y</td><td>1920720</td></tr><tr><td>Z</td><td>800200</td><td>2</td><td>1024324</td><td>3</td><td>7201280</td><td>4</td><td>19201200</td><td>5</td><td>1366768</td><td>6</td><td>1280320</td></tr></table>												A	128160	B	320234	C	320240	D	480234	E	480272	F	640480	G	800480	H	1024600	I	320480	J	240320	K	800600	L	240400	M	1024768	N	128128	P	1280800	Q	480800	R	640320	S	480128	T	800320	U	8001280	V	176220	W	1280398	X	1024250	Y	1920720	Z	800200	2	1024324	3	7201280	4	19201200	5	1366768	6	1280320
A	128160	B	320234	C	320240	D	480234	E	480272	F	640480																																																													
G	800480	H	1024600	I	320480	J	240320	K	800600	L	240400																																																													
M	1024768	N	128128	P	1280800	Q	480800	R	640320	S	480128																																																													
T	800320	U	8001280	V	176220	W	1280398	X	1024250	Y	1920720																																																													
Z	800200	2	1024324	3	7201280	4	19201200	5	1366768	6	1280320																																																													
⑨	D: Digital L : LVDS M:MIPI																																																																							
⑩	Interface: <table><tr><td>N</td><td>Without control board</td><td>A</td><td>8Bit</td><td>B</td><td>16Bit</td><td>H</td><td>HDMI</td></tr><tr><td>I</td><td>I2C Interface</td><td>R</td><td>RS232</td><td>S</td><td>SPI Interface</td><td>U</td><td>USB</td></tr></table>												N	Without control board	A	8Bit	B	16Bit	H	HDMI	I	I2C Interface	R	RS232	S	SPI Interface	U	USB																																												
N	Without control board	A	8Bit	B	16Bit	H	HDMI																																																																	
I	I2C Interface	R	RS232	S	SPI Interface	U	USB																																																																	
⑪	TS: <table><tr><td>N</td><td>Without TS</td><td>T</td><td>Resistive touch panel</td><td>C</td><td>Capacitive touch panel (G-F-F)</td></tr><tr><td>G</td><td>Capacitive touch panel (G-G)</td><td>C1</td><td>Capacitive touch panel (G-F-F)+OCA</td></tr><tr><td>C2</td><td>Capacitive touch panel (G-F-F)+OCR</td><td>G1</td><td>Capacitive touch panel (G-G)+OCA</td></tr><tr><td>G2</td><td>Capacitive touch panel (G-G)+OCR</td><td>B</td><td>CTP+GG+USB</td></tr></table>												N	Without TS	T	Resistive touch panel	C	Capacitive touch panel (G-F-F)	G	Capacitive touch panel (G-G)	C1	Capacitive touch panel (G-F-F)+OCA	C2	Capacitive touch panel (G-F-F)+OCR	G1	Capacitive touch panel (G-G)+OCA	G2	Capacitive touch panel (G-G)+OCR	B	CTP+GG+USB																																										
N	Without TS	T	Resistive touch panel	C	Capacitive touch panel (G-F-F)																																																																			
G	Capacitive touch panel (G-G)	C1	Capacitive touch panel (G-F-F)+OCA																																																																					
C2	Capacitive touch panel (G-F-F)+OCR	G1	Capacitive touch panel (G-G)+OCA																																																																					
G2	Capacitive touch panel (G-G)+OCR	B	CTP+GG+USB																																																																					
⑫	Version: X:Raspberry pi																																																																							
⑬	Special Code	#:Fit in with ROHS directive regulations																																																																						

--	--	--

WINSTAR DISPLAY Co., Ltd.

2.Summary

TFT 5.7” is a TFT-LCD module. It is composed of a TFT-LCD panel, driver IC ,FPC, a backlight unit. The 5.7 display area contains 640 x 480pixels and can display up to 16.7M colors. This product accords with RoHS environmental criterion.

WINSTAR DISPLAY Co., Ltd.

3.General Specifications

Item	Dimension	Unit
Size	5.7	inch
Dot Matrix	640 x RGBx480(TFT)	dots
Module dimension	124.7 x 100.0 x 7.41	mm
Active area	115.2 x 86.4	mm
Pixel pitch	0.18 x 0.18	mm
LCD type	TFT, Normally black, Transmissive	
View Angle	80/80/80/80	
TFT Driver IC	JD9168S or Equivalent	
TFT interface	RGB18bits SYNC+DE mode	
Aspect Ratio	4:3	
Backlight Type	LED ,Normally White	
With /Without TP	With RTP	
Surface	Anti-Glare	

*Color tone slight changed by temperature and driving voltage.

4. Absolute Maximum Ratings

Item	Symbol	Min	Typ	Max	Unit
Operating Temperature	TOP	-20	—	+70	°C
Storage Temperature	TST	-30	—	+80	°C

Note: Device is subject to be damaged permanently if stresses beyond those absolute maximum ratings listed above

1. Temp. $\leq 60^{\circ}\text{C}$, 90% RH MAX. Temp. $> 60^{\circ}\text{C}$, Absolute humidity shall be less than 90% RH at 60°C

5. Electrical Characteristics

5.1. Operating conditions:


Parameter		Symbol	Condition	Min	Typ	Max	Unit	Note
Supply Voltage		VCC	Ta=25°C	3.0	3.3	3.6	V	
Input voltage	H	VIH	VCC=3.0V	0.7VCC	-	VCC		
	L	VIL	VCC=3.0V	0	-	0.3VCC	mW	
Power supply Current (Operating)		ICC	VCC=3.0V	—	50	75	mA	1

Note1 ALL White Display pattern

5.2. LED driving conditions

Parameter	Symbol	Min.	Typ.	Max.	Unit	Remark
LED current	-	-	80	-	mA	-
Power Consumption	-	1344	1440	1536	mW	-
LED voltage	VLED+	16.8	18.0	19.2	V	Note 1
LED Life Time	-	50,000	-	-	Hr	Note 2,3,4

Note 1 : There are 1 Groups LED

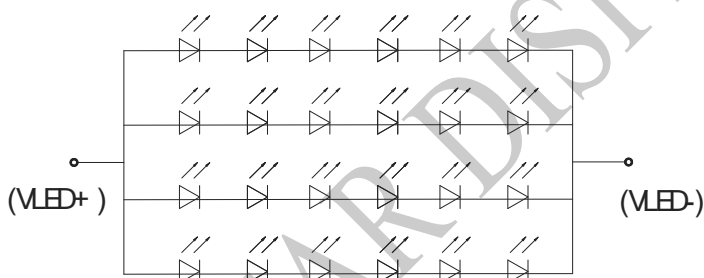

Back Light Circuit

Note 2 : Ta = 25 °C


Note 3 : Brightness to be decreased to 50% of the initial value

Note 4 : The single LED lamp case


6.Timing Characteristics

RGB Interface

Vertical Timings

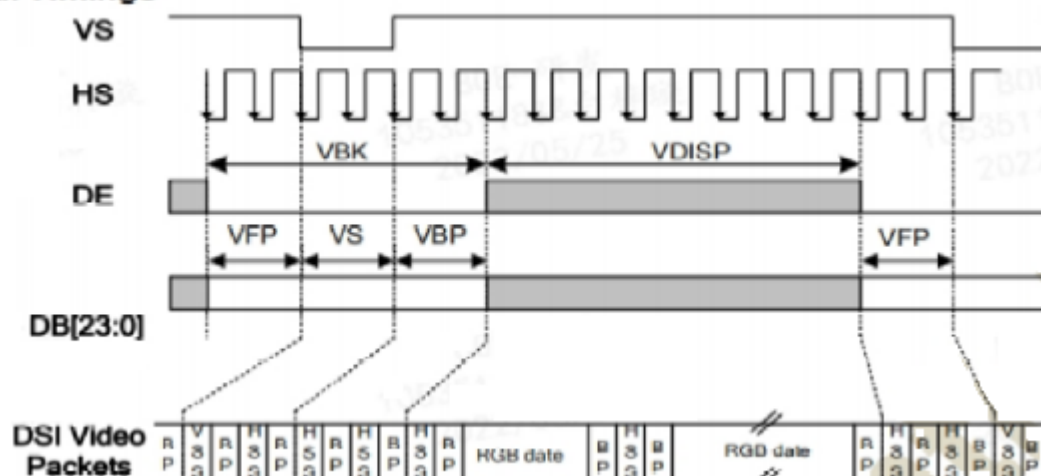


Horizontal Timings

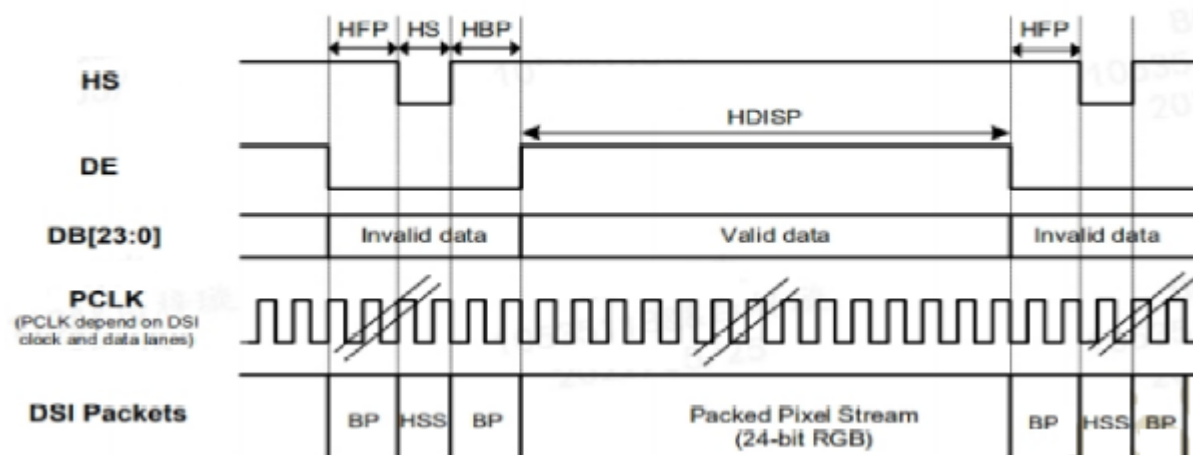

Signal	Item	Symb ol	Min	Typ	Max	Unit	Note
PCLK	Frequency	Fc	18	20	27	MHZ	
Vertical Active Display Term	Total	Tv	501	518	535	Th	$T_v = V_{DISP} + V_{BK}$
	Display	VDISP		480		Th	
	Blank	VBK	21	38	55	Th	$VBK = VS + VBP + VFP$
Horizontal Active Display Term	Total	Th	652	664	700	Tc(*)	$Th = H_{DISP} + H_{BLK}$
	Display	HDISP		640		Tc(*)	
	Blank	HBLK	12	24	60	Tc(*)	$H_{BLK} = HS + HBP + HFP$

Tc: PCLK cycle time.


7.Power Sequence

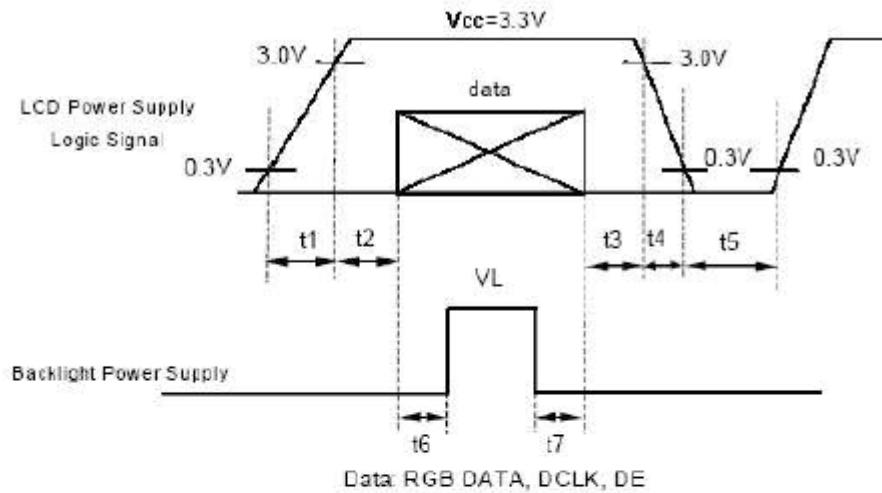

*2) VCC-dip condition:

(1) $2.7V \leq V_{CC} < 3.0V, t_d \leq 10ms$


(2) $V_{CC} > 3.0V$, VCC-dip condition should be the same with VCC-turn-on condition .

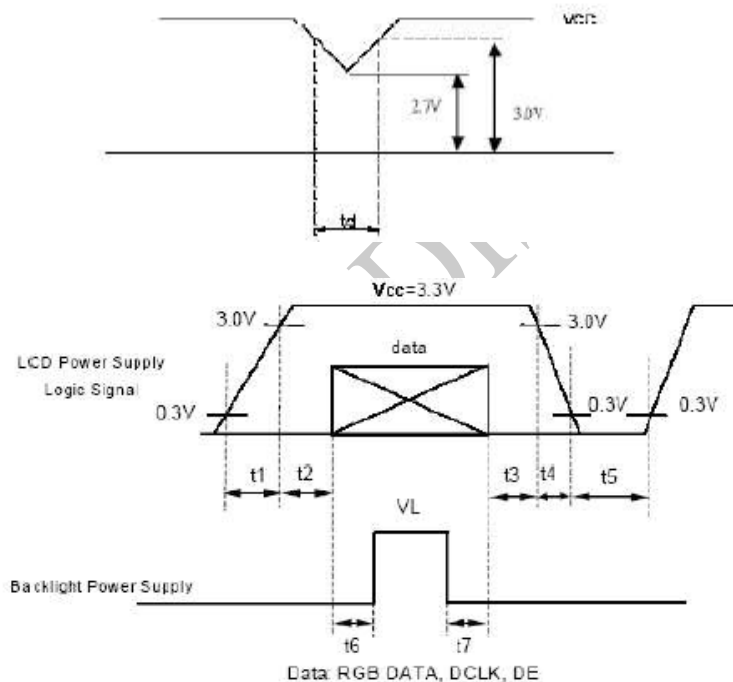

*2) VCC-dip condition:

(1) $2.7V \leq V_{CC} < 3.0V, t_d \leq 10ms$

(2) $V_{CC} > 3.0V$, VCC-dip condition should be the same with VCC-turn-on condition .

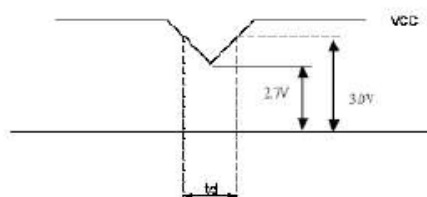

$t1 \leq 10ms$: $1sec \leq t5$
 $50ms \leq t2$: $200ms \leq t6$
 $0 < t3 \leq 50ms$: $200ms \leq t7$
 $0 < t4 \leq 10ms$

8.Optical Characteristics

Item		Symbol	Condition.	Min	Typ.	Max.	Unit	Remark
Response time		Tr+ Tf	$\theta=0^{\circ}$ 、 $\Phi=0^{\circ}$	-	30	35	ms	Note 3
Contrast ratio		CR	At optimized viewing angle	1000	1200	-	-	Note 4
Color Chromaticity	White	Wx	$\theta=0^{\circ}$ 、 $\Phi=0$	0.242	0.292	0.342	-	Note 2,6,7
		Wy		0.287	0.337	0.387	-	
Viewing angle	Hor.	ΘR	$CR\geq 10$	-	80	-	Deg.	Note 1
		ΘL		-	80	-		
	Ver.	ΦT		-	80	-		
		ΦB		-	80	-		
Brightness		-	-	250	350	-	cd/m ²	Center of display
Uniformity		(U)	-	70	-	-	%	Note5

Ta=25±2°C, IL=80mA

Note 1: Definition of viewing angle range

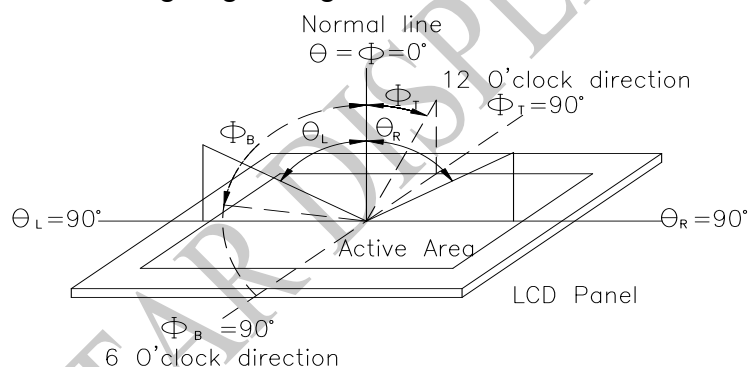


Fig.8.1. Definition of viewing angle

Note 2: Test equipment setup:

After stabilizing and leaving the panel alone at a driven temperature for 10 minutes, the measurement should be executed. Measurement should be executed in a stable, windless, and dark room. Optical specifications are measured by Topcon BM-7orBM-5 luminance meter 1.0° field of view at a distance of 50cm and normal direction.


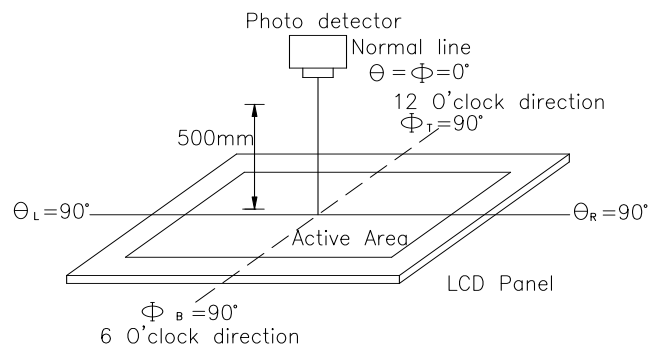


Fig. 8.2. Optical measurement system setup

Note 3: Definition of Response time:

The response time is defined as the LCD optical switching time interval between “White” state and “Black” state. Rise time, T_r , is the time between photo detector output intensity changed from 90% to 10%. And fall time, T_f , is the time between photo detector output intensity changed from 10% to 90%

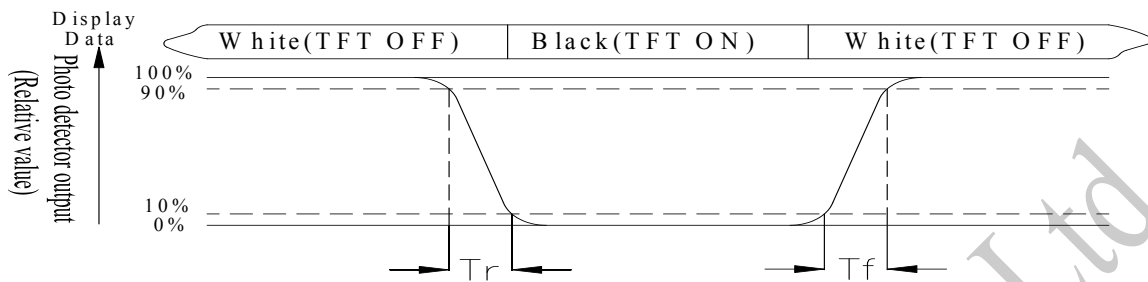

Note 4: Definition of contrast ratio:

The contrast ratio is defined as the following expression.

$$\text{Contrast ratio (CR)} = \frac{\text{Luminance measured when LCD on the "White" state}}{\text{Luminance measured when LCD on the "Black" state}}$$

Note 5: Definition of Luminance Uniformity

Active area is divided into 9 measuring areas (reference the picture in below). Every measuring point is placed at the center of each measuring area.

Luminance Uniformity (U) = $L_{\min}/L_{\max} \times 100\%$

L = Active area length

W = Active area width

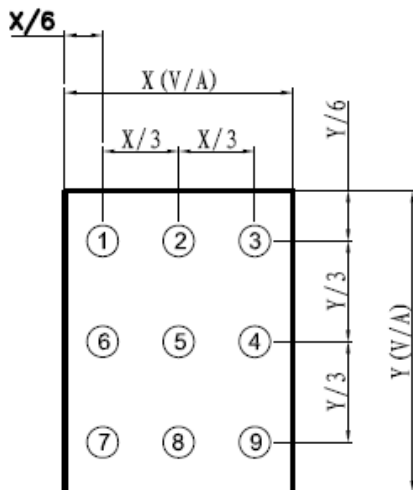


Fig8.3. . Definition of uniformity

Note 6: Definition of color chromaticity (CIE 1931)

Color coordinates measured at the center point of LCD

Note 7: Measured at the center area of the panel when all the input terminals of LCD panel are electrically opened.

9.Interface

9.1. LCM PIN Definition

Pin	Symbol	I/O	Function	Remark
1	GND	P	Ground.	
2	VCC	P	Power supply for TFT	
3	VCC	P	Power supply for TFT	
4	GND	P	Ground.	
5	NC	-	No connection	
6	GND	P	Ground.	
7	NC	-	No connection	
8	GND	P	Ground.	
9	UD	I	Up/down selection	
10	LR	I	Left /right selection	
11	/CSX	I	Chip select pin. 0: Chip can be accessed; 1: Chip cannot be accessed. If this pin is not used, please connect it to VCC.	
12	SCL	I	Serial clock input in SPI interface .If not use, let it open or VCC or GND.	
13	SDA	I	Serial data input / output pin in SPI interface operation. If not use, let it open.	
14	NC	-	No connection	
15	GND	P	Ground.	
16	B5	I	Blue Data bus	
17	B4	I	Blue Data bus	
18	B3	I	Blue Data bus	
19	B2	I	Blue Data bus	
20	B1	I	Blue Data bus	
21	B0	I	Blue Data bus	
22	NC	-	No connection	
23	NC	-	No connection	
24	GND	P	Ground.	
25	G5	I	Green Data bit	
26	G4	I	Green Data bit	
27	G3	I	Green Data bit	
28	G2	I	Green Data bit	

29	G1	I	Green Data bit	
30	G0	I	Green Data bit	
31	NC	-	No connection	
32	NC	-	No connection	
33	GND	P	Ground.	
34	NC	-	No connection	
35	NC	-	No connection	
36	GND	P	Ground.	
37	R5	I	Red Data bit	
38	R4	I	Red Data bit	
39	R3	I	Red Data bit	
40	R2	I	Red Data bit	
41	R1	I	Red Data bit	
42	R0	I	Red Data bit	
43	VLED-	P	Power supply for LED cathode	
44	VLED+	P	Power supply for LED anode	
45	DE	I	Data enable input in RGB interface.	
46	CLK	I	Pixel clock input in RGB interface.	
47	HS	I	Horizontal sync input in RGB interface.	
48	VS	I	Vertical sync input in RGB interface	
49	NC	-	No connection	
50	GND	P	Ground.	

10. Reliability

Content of Reliability Test (Wide temperature, -20°C~70°C)

Environmental Test			
Test Item	Content of Test	Test Condition	Note
High Temperature storage	Endurance test applying the high storage temperature for a long time.	80°C 200hrs	2
Low Temperature storage	Endurance test applying the low storage temperature for a long time.	-30°C 200hrs	1,2
High Temperature Operation	Endurance test applying the electric stress (Voltage & Current) and the thermal stress to the element for a long time.	70°C 200hrs	2
Low Temperature Operation	Endurance test applying the electric stress under low temperature for a long time.	-20°C 200hrs	1,2
High Temperature/Humidity Operation	The module should be allowed to stand at 60°C,90%RH max	60°C,90%RH 96hrs	1,2
Thermal shock resistance	The sample should be allowed stand the following 10 cycles of operation -20°C 25°C 70°C  30min 5min 30min 1 cycle	-20°C/70°C 10 cycles	2
Vibration test	Endurance test applying the vibration during transportation and using.	Total fixed amplitude : 1.5mm Vibration Frequency : 10~55Hz One cycle 60 seconds to 3 directions of X,Y,Z for Each 15 minutes	3
Static electricity test	Endurance test applying the electric stress to the terminal.	VS=±4KV(contact), ±8KV(air) RS=330Ω CS=150pF 10 times	4

Note1: No dew condensation to be observed.

Note2: The function test shall be conducted after 4 hours storage at the normal Temperature and humidity after remove from the test chamber.


Note3: The packing have to including into the vibration testing.

Note4: Endurance test applying the electric stress to the finished product housing


11.Touch Panel Information

NOTES: ALL MATERIALS AND COMPONENTS MUST BE RoHS COMPLIANT.

FRONT VIEW

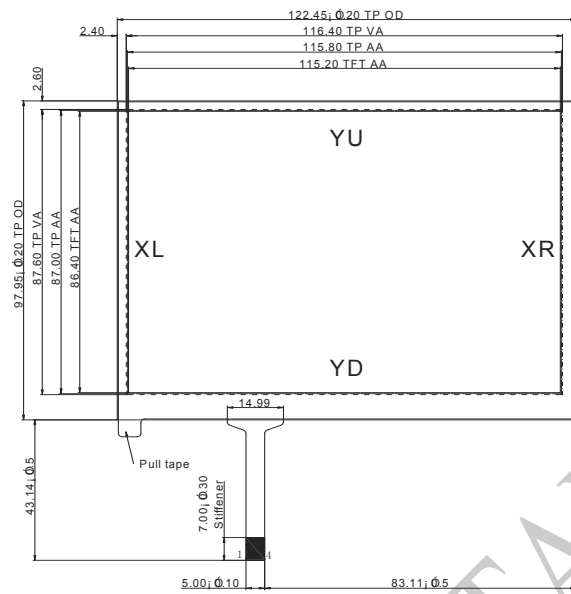

BACK VIEW

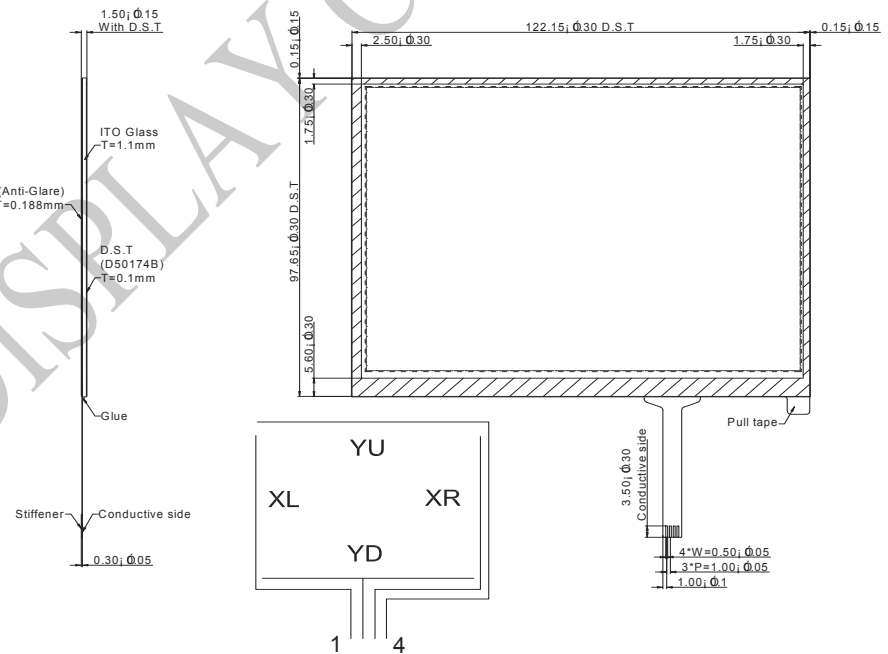

TOUCH PANEL PIN ASSIGNMENT

1	XL	Top Film Terminal
2	YD	Bottom Glass Terminal
3	XR	Top Film Terminal
4	YU	Bottom Glass Terminal

TOLERANCE NO SPECIFIED: $\pm$ 0.3mm

11.1. Resistance Touch Panel General Specifications

Item	Description
Supply voltage	DC 5V Max
Activation force	20~120g
Linearity	$\leq 1.5\%$
(Insulation resistance	$\geq 20M\Omega$ (DC 25V)
Light transmission	70%
Structure type	ITO Film/ITO Glass(F/G)
Surface hardness	$\geq 3H$ (Pencil)
Hitting life time	> 1000,000 times
Loop resistance	X: 200~900 Ω
	Y: 200~900 Ω

Technical drawing of a 640 X RGB X 480 TFT LCD module. The drawing includes a top view, a side view, and a detail view of the contact side.

Top View Dimensions:

- Overall width: 124.70; $\varnothing 3$ TFT OD
- Overall height: 100.00; $\varnothing 3$ TFT OD
- Internal dimensions: 122.45; $\varnothing 2$ TP OD, 116.80 FRAME VA, 116.40 TP VA, 115.80 TP AA, 115.20 TFT AA
- Vertical dimensions: 1.75; $\varnothing 5$, 3.95, 4.15; $\varnothing 5$, (4.45), 4.75
- Horizontal dimensions: 1.55; $\varnothing 5$, 3.95, 4.15; $\varnothing 5$, (4.45), 4.75
- Module size: 640 X RGB X 480
- Labels: XL, XR, YL, YD, YU, YB, RGB, Bending area, Component area, PULL TAPE
- Other dimensions: 56.90; $\varnothing 5$, 43.14; $\varnothing 5$, 7.00, 34.34; $\varnothing 5$, 47.15; $\varnothing 5$, 12.00; $\varnothing 5$, 8.40; $\varnothing 5$, 0.30; $\varnothing 5$, 0.30; $\varnothing 5$

Side View Dimensions:

- Overall height: 7.41; $\varnothing 4.5$
- Internal height: 5.91; $\varnothing 3$
- Stiffener dimensions: 1.60 MAX, 0.30; $\varnothing 5$
- Contact side dimensions: 0.30; $\varnothing 5$

Detail View Dimensions:

- Overall width: 59.10; $\varnothing 15$
- Internal width: 25.50; $\varnothing 1$
- Height: 3.00
- Other dimensions: 2.0; $\varnothing 1$, 0.30; $\varnothing 5$, P0.5*49=24.50; $\varnothing 1$, (14.63)

Pin Configurations:

TFT FPC:

PIN NO.	SYMBOL	PIN NO.	SYMBOL
1	GND	26	G4
2	VCC	27	G3
3	VCC	28	G2
4	GND	29	G1
5	NC	30	G0
6	GND	31	NC
7	NC	32	NC
8	GND	33	GND
9	UD	34	NC
10	LR	35	NC
11	/CSX	36	GND
12	SCL	37	R5
13	SDA	38	R4
14	NC	39	R3
15	GND	40	R2
16	B5	41	R1
17	B4	42	R0
18	B3	43	VLED-
19	B2	44	VLED+
20	B1	45	DE
21	B0	46	CLK
22	NC	47	HS
23	NC	48	VS
24	GND	49	NC
25	G5	50	GND

RTP FPC:

PIN NO.	SYMBOL
1	XL
2	YD
3	XR
4	YU

Other Details:

- Steel 1=0.2
- 0.50; $\varnothing 05$
- P1.0*3=3.00; $\varnothing 05$
- 5.00; $\varnothing 1$
- RTP Contact side

The non-specified tolerance of dimension is ± 0.3 mm.

**1、Panel Specification :**

- | | | |
|----------------------------|-------------------------------|-------------------------------------|
| 1. Panel Type : | ☐ Pass | ☐ NG , _____ |
| 2. View Direction : | ☐ Pass | ☐ NG , _____ |
| 3. Numbers of Dots : | ☐ Pass | ☐ NG , _____ |
| 4. View Area : | ☐ Pass | ☐ NG , _____ |
| 5. Active Area : | ☐ Pass | ☐ NG , _____ |
| 6. Operating Temperature : | ☐ Pass | ☐ NG , _____ |
| 7. Storage Temperature : | ☐ Pass | ☐ NG , _____ |
| 8. Others : | _____ | |

2、Mechanical

- | | | |
|-----------------------------|-------------------------------|-------------------------------------|
| 1. PCB Size : | ☐ Pass | ☐ NG , _____ |
| 2. Frame Size : | ☐ Pass | ☐ NG , _____ |
| 3. Material of Frame : | ☐ Pass | ☐ NG , _____ |
| 4. Connector Position : | ☐ Pass | ☐ NG , _____ |
| 5. Fix Hole Position : | ☐ Pass | ☐ NG , _____ |
| 6. Backlight Position : | ☐ Pass | ☐ NG , _____ |
| 7. Thickness of PCB : | ☐ Pass | ☐ NG , _____ |
| 8. Height of Frame to PCB : | ☐ Pass | ☐ NG , _____ |
| 9. Height of Module : | ☐ Pass | ☐ NG , _____ |
| 10. Others : | ☐ Pass | ☐ NG , _____ |

3、Relative Hole Size :

- | | | |
|-----------------------------|-------------------------------|-------------------------------------|
| 1. Pitch of Connector : | ☐ Pass | ☐ NG , _____ |
| 2. Hole size of Connector : | ☐ Pass | ☐ NG , _____ |
| 3. Mounting Hole size : | ☐ Pass | ☐ NG , _____ |
| 4. Mounting Hole Type : | ☐ Pass | ☐ NG , _____ |
| 5. Others : | ☐ Pass | ☐ NG , _____ |

4、Backlight Specification :

- | | | |
|--|-------------------------------|-------------------------------------|
| 1. B/L Type : | ☐ Pass | ☐ NG , _____ |
| 2. B/L Color : | ☐ Pass | ☐ NG , _____ |
| 3. B/L Driving Voltage (Reference for LED Temp.) : | ☐ Pass | ☐ NG , _____ |
| 4. B/L Driving Current : | ☐ Pass | ☐ NG , _____ |
| 5. Brightness of B/L : | ☐ Pass | ☐ NG , _____ |
| 6. B/L Solder Method : | ☐ Pass | ☐ NG , _____ |
| 7. Others : | ☐ Pass | ☐ NG , _____ |

>> Go to page 2 <<



Winstar Module Number : _____

Page: 2

5、Electronic Characteristics of Module :

- | | | |
|------------------------------|-------------------------------|-------------------------------------|
| 1. Input Voltage : | ☐ Pass | ☐ NG , _____ |
| 2. Supply Current : | ☐ Pass | ☐ NG , _____ |
| 3. Driving Voltage for LCD : | ☐ Pass | ☐ NG , _____ |
| 4. Contrast for LCD : | ☐ Pass | ☐ NG , _____ |
| 5. B/L Driving Method : | ☐ Pass | ☐ NG , _____ |
| 6. Negative Voltage Output : | ☐ Pass | ☐ NG , _____ |
| 7. Interface Function : | ☐ Pass | ☐ NG , _____ |
| 8. LCD Uniformity : | ☐ Pass | ☐ NG , _____ |
| 9. ESD test : | ☐ Pass | ☐ NG , _____ |
| 10. Others : | ☐ Pass | ☐ NG , _____ |

6、Summary :

Sales signature : _____

Customer Signature : _____

Date : / /